




glare shield
MSGS



raw copper
MSGS/CO

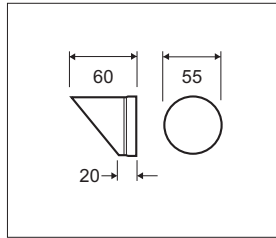





natural anodised
MSGS/NA




black anodised
MSGS/BA

specifications

-  Glare shield for wall-light/spotlight
-  - Copper
-  - Spun Aluminium
-  55mm



installation blockout (standard)
MSBOS

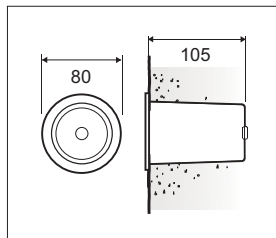




raw copper
MSBOS/CO




aluminium
MSBOS/AL

specifications

-  - Copper
- use with copper steplights
- Spun Aluminium
- use with cast or spun aluminium steplights or inground uplights
-  80mm
-  105mm



installation blockout (deep)
MSBOD (deep)

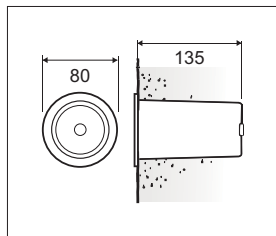




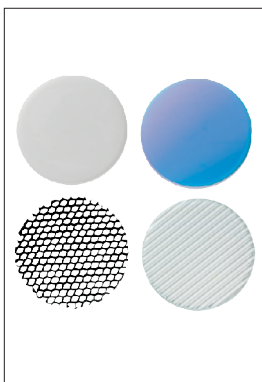
raw copper
MSBOD/CO




aluminium
MSBOD/AL

specifications

-  - Copper
- use with copper steplights
- Spun Aluminium
- use with cast or spun aluminium steplights or inground uplights
-  80mm
-  135mm



lenses & louvres
LNS

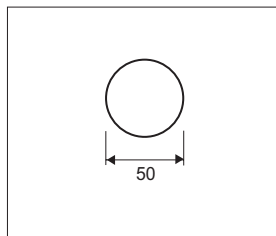






honeycombe louvre
LRV-HC

linear spread lens
LNS-LS

frosted lens
LNS-FR

coloured dichroic lens
LNS-DC

specifications

-  Honeycomb louvre - Glare control
-  Linear spread lens - Beam elongation
-  Frosted lens - Beam diffusion
-  Coloured dichroic lens - Colour
- 40 different coloured lenses are available. Please ask your lighting consultant.
-  50mm