




Spotlight adjustable with ground spike



RANGE


- Raw Copper
SPLA-GS100-CO
SPLA-GS300-CO
SPLA-GS600-CO
- Natural Anodised
SPLA-GS100-SN
SPLA-GS300-SN
SPLA-GS600-SN
- Black Anodised
SPLA-GS100-BK
SPLA-GS300-BK
SPLA-GS600-BK

SPECIFICATIONS

- Spun raw Copper
- Spun raw Aluminium
- Marine anodised to 25 microns (um)
- IP Rating - IP65
- LAMPS**
- 12V LED MR16 3 - 10W
- OPTIONS**
- Remote transformer 12 Volt



Uplight Fixed with ground spike



RANGE


- Raw Copper
UL-FXGS-CO
- Natural Anodised
UL-FXGS-SN
- Black Anodised
UL-FXGS-BK

SPECIFICATIONS

- Spun raw Copper
- Spun raw Aluminium
- Marine anodised to 25 microns (um)
- IP Rating - IP65
- LAMPS**
- 12V LED MR16 3 - 10W
- OPTIONS**
- Remote transformer 12 Volt



Eco adjustable with ground spike



RANGE


- Raw Copper
ECOSPOT-CO
- Natural Anodised
ECOSPOT-SN
- Black Anodised
ECOSPOT-BK

SPECIFICATIONS

- Spun raw Copper
- Spun raw Aluminium
- Marine anodised to 25 microns (um)
- IP Rating - IP65
- LAMPS**
- 12V LED MR16 3 - 10W
- OPTIONS**
- Remote transformer 12 Volt



Spotlight Twin adjustable with ground spike



RANGE


- Raw Copper
SPLTA-GS600-CO
- Natural Anodised
SPLTA-GS600-SN
- Black Anodised
SPLTA-GS600-BK

SPECIFICATIONS

- Spun raw Copper
- Spun raw Aluminium
- Marine anodised to 25 microns (um)
- IP Rating - IP65
- LAMPS**
- 12V LED MR16 3 - 10W
- OPTIONS**
- Remote transformer 12 Volt



Spread Light with ground spike



RANGE

Raw Copper
SPRL-CO

Natural Anodised
SPRL-SN


Black Anodised
SPRL-BK

SPECIFICATIONS

- Spun raw Copper
 - Spun raw Aluminium Marine anodised to 25 microns (um)
 - IP Rating - IP64
- LAMPS**
- 12V LED G4 Capsule 1 - 3W
- OPTIONS**
- Remote transformer 12 Volt



Path Light with ground spike



RANGE

Raw Copper
PATHL-400-CO
PATHL-700-CO



Natural Anodised
PATHL-400-SN
PATHL-700-SN




Black Anodised
PATHL-400-BK
PATHL-700-BK

SPECIFICATIONS

- Spun raw Copper
 - Spun raw Aluminium Marine anodised to 25 microns (um)
 - IP Rating - IP64
- LAMPS**
- 12V LED G4 Capsule 1 - 3W
- OPTIONS**
- Remote transformer 12 Volt



Bollard round 390 / 750mm

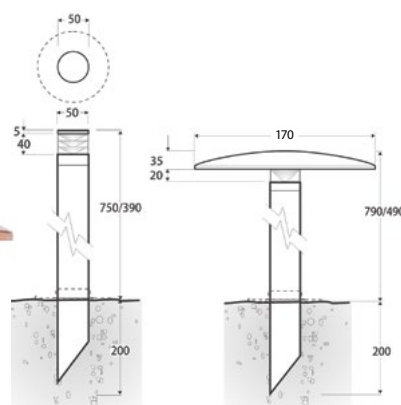

RANGE

Raw Copper
BL-390-CO
BL-750-CO

BLSL-170-CO*



Natural Anodised
BL-390-SN
BL-750-SN

BLSL-170-SN*



Black Anodised
BL-390-BK
BL-750-BK

BLSL-170-BK*

SPECIFICATIONS


- Spun raw Copper
 - Spun raw Aluminium Marine anodised to 25 microns (um)
 - IP Rating - IP64
- LAMPS**
- 12V LED MR16 5W
- OPTIONS**
- Remote transformer 12 Volt

NOTE *

- **BLSL-170-CO/SN/BK** is Round Bollard including Top Hat



Bollard square



RANGE

Square Solid Timber
BL-SST-650

SPECIFICATIONS

- Spun raw Copper
 - IP Rating - IP65
- LAMPS**
- 12V LED MR16 3 - 10W
- OPTIONS**
- Remote transformer 12 Volt